

# FIRE-EX TURBO 1000 >



Suitable for  
Turbo nozzles:

T2130\*, T2235,  
T2400, T2475,  
T2750, T2950

and the  
TURBO-TWIST  
system

\* since year of manufacture 2018




**PATENTED**


With the small, reloadable FIRE-EX TURBO 1000 plug-in cartridge you can reduce the surface tension of up to 1000 litres of extinguishing water directly in the inlet of your AWG Turbo nozzle. Simple, with no additional devices and independent of the flow rate. Lets you tackle class A fires quickly and effectively >

**THE COMPACT, EFFECTIVE SOLUTION  
FOR CREATING WETTING AGENTS**

**AWG**

A Unit of IDEX Corporation

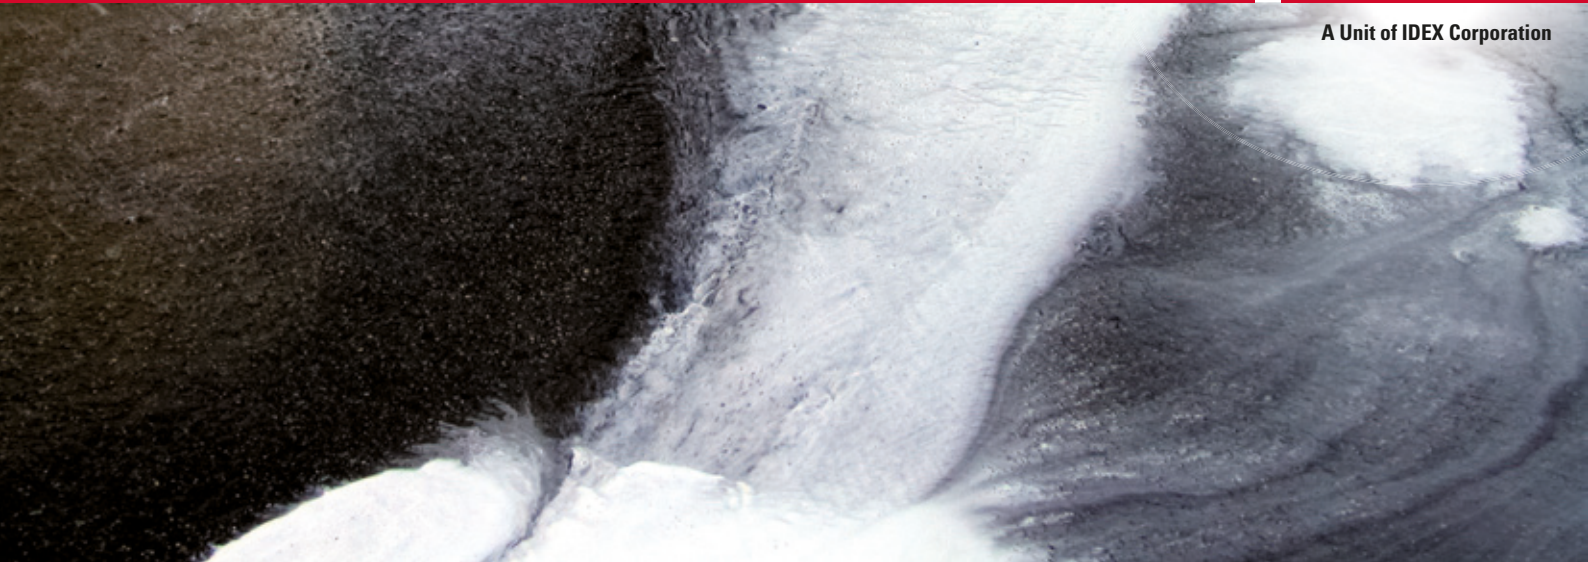

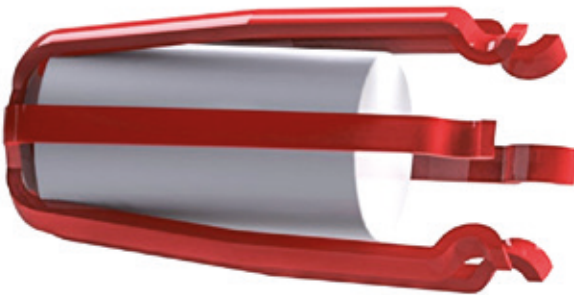

> The FIRE-EX TURBO 1000 plug-in cartridge comprises a reusable wetting agent holder made from plastic and a special wetting agent capsule. **Using the FIRE-EX TURBO 1000 is as simple as it is effective.** Insert the plug-in cartridge, loaded with a wetting agent capsule, closed side first into the inlet of your Turbo nozzle, couple the hose on and the system is ready for use – **and with no change to the flow performance!** Around 1000 litres of wetting agent can be generated with one wetting agent capsule.

In use, the water flows around the wetting agent capsule, steadily adding wetting agent to the extinguishing water. The wetting and the penetration characteristics of the extinguishing water are improved enabling solid fires to be better cooled and extinguished with a lower water demand. If a wetting agent capsule has not been exhausted during use, it can be removed afterwards, dried and then used again with the next deployment without hesitation.

- **Can be used with AWG Turbo nozzles: T2130\*, T2235, T2400, T2475, T2750, T2950 and System TURBO-TWIST**
- **Simple operation**
- **Non-toxic, environmentally neutral and biodegradable**
- **Small and easy to handle**
- **Low costs**
- **Minimal pressure loss during use**
- **Function similar to the tried and trusted FIRE-EX 2000**

When using the FIRE-EX TUBO 1000 there is no risk to the fire fighters as the wetting agent is free of fluorinated surfactants, non-toxic, environmentally neutral and biodegradable – confirmed by EC safety datasheet 91/155/EEC.

#### Also suitable for:

- Removal of oil / decontamination of traffic areas
- Cleaning fire trucks, equipment and hoses after use.

#### Technical Data

##### FIRE-EX TURBO 1000 Cartridge Adapter

<i>Suitable for model</i>	T2130*, T2235, T2400, T2475, T2750, T2950 und System TURBO-TWIST
<i>Suitable for adapters</i>	Storz 52 (C), BI 2,5" male, DSP 65, GOST 70
<i>Weight</i>	0,02 kg
<i>AWG Id-No.</i>	300 799 59



##### Wetting Agent FIRE-EX TURBO 1000

<i>Pieces/bag</i>	20
<i>Weight</i>	2,4 kg
<i>AWG Id-No.</i>	504 096 99



\* since year of manufacture 2018



Would you like to request further information or a technical consultation? Call us!

**+49 7340 91 88 98 -0**

Simply send us your enquiry by email

**awg-info@idexcorp.com**

For an overview, visit our website

**www.awg-fittings.com**

*Anyone who rescues lives and protects property day in and day out must be able to rely on their tools. Many of them opt for AWG and Alco products.*

*Two brands, which together offer one of the broadest ranges of premium equipment for emergency services.*



**AWG Fittings GmbH** . Germany  
A Unit of IDEX Corporation